


# Hangzhou W2 Security Camera User Manual 2AG7C-G01T2-C6

## Manualsum, simplified manuals

### Table of Contents

- [Wireless battery Wi-Fi security camera QUICK GUIDE](#)
  - [Packing list](#)
  - [Product description](#)
  - [Installation](#)
  - [Product configuration](#)
    - [Registration](#)
    - [Powering on the device](#)
  - [Specifications](#)

## **Wireless battery Wi-Fi security camera QUICK GUIDE**

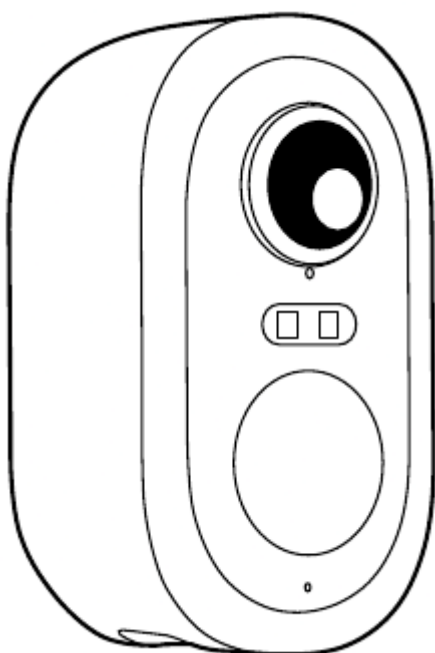

## Packing list




Camera X1




Screw package X1



Power adapter X1



Power cable X1




Bracket X1



Quick guide X1

## Product description

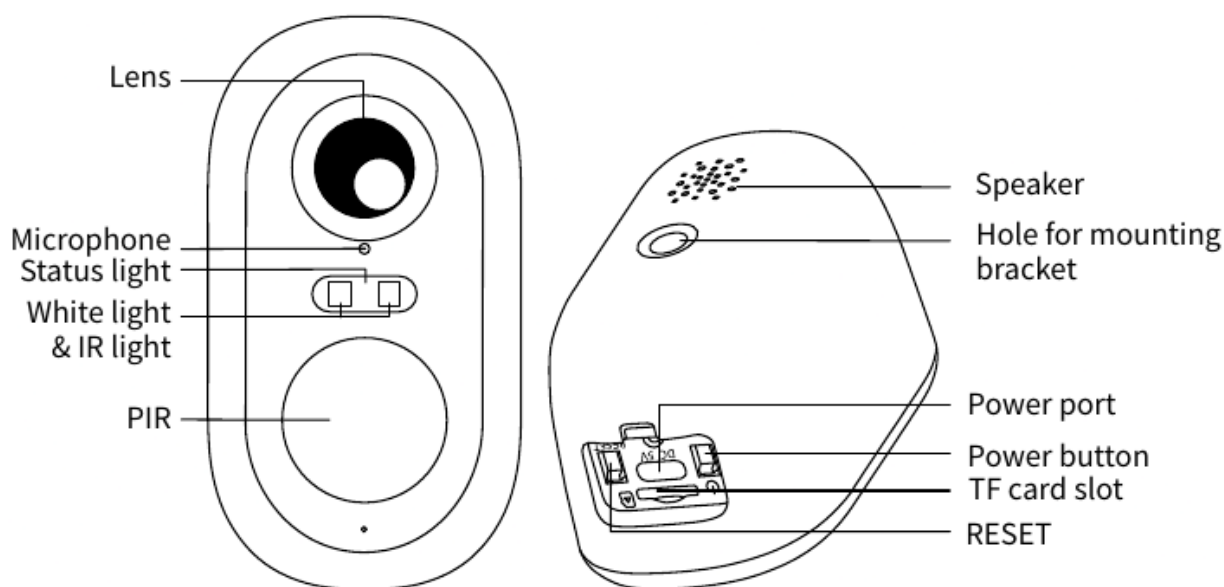

**Flashing red light (slow)** Wait for network configuration

**Flashing red light (fast)** Connecting the network

**Fixed red light** Network is malfunctional

**Fixed blue light** Camera is working correctly


## Installation

**1. Find a position where you can get the desired field of view.**

Consider the below factors:


1. Avoid direct sunlight.

2. Keep it in range of your router Wi-Fi.
3. Avoid the front of the lens facing the plant or porch light; Avoid facing a busy road.
4. Install it 2-3 meters (7-10 ft) above the ground - close enough to see someone's face and talk to them through the camera. Make sure that the camera can see what you want to see.

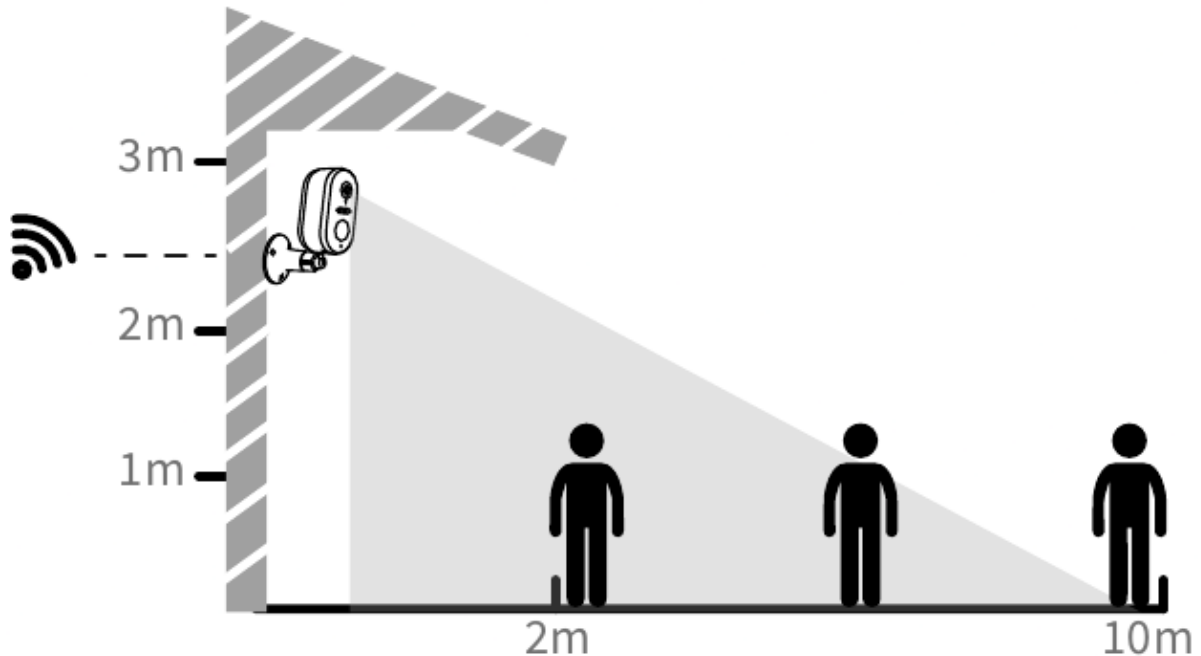


## 2. Use screws and bracket to install the camera.

- a. Fix the screw bracket on the wall with screws.

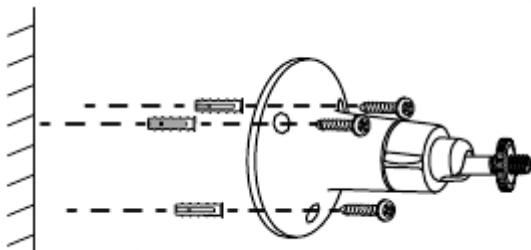

- b. Install the device in the bracket and lock it with the bottom screw.

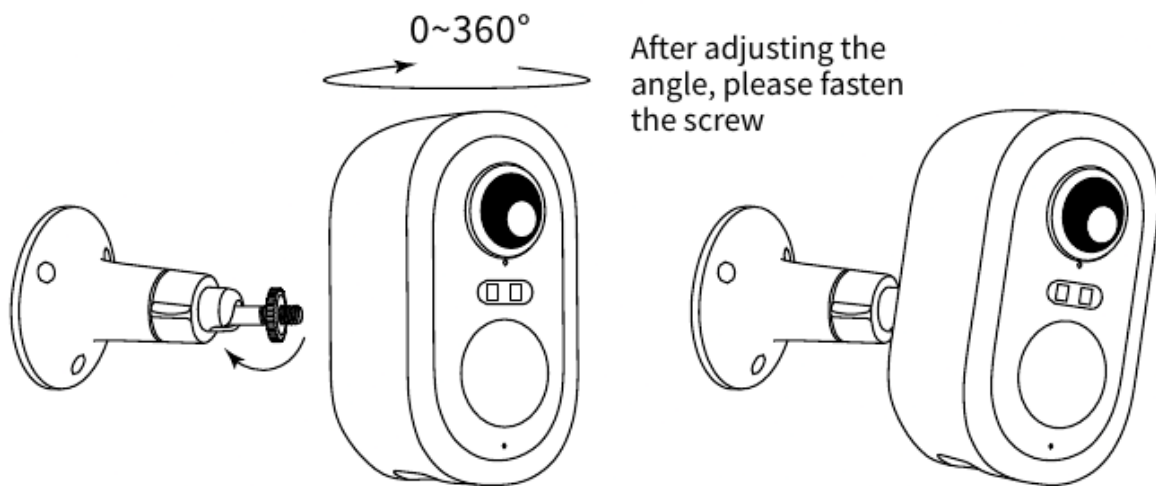

## Product configuration

Scan QR code to download and install the Arenti App. Or you can search "Arenti" on App Store (iOS) or Google Play (Android).

## Registration

Open the App. If you are a new user, tap to create a new account and follow the prompts to complete account setup.


## Powering on the device

Power on the camera. Status light flashing red indicates that the camera is ready for pairing.

### Pairing method 1: pairing via QR code on device

Open App home page, click "+" >> "Scan Code", then scan the QR code pasted on the device casing with the App of your phone, and add the camera to the App.

**Note:** When pairing, please put the camera and phone close to the router. If camera is not in the red slow blinking after 30 seconds of powering on, press and hold the reset button for 5 seconds to reset, and then restart to pair the camera with the App.

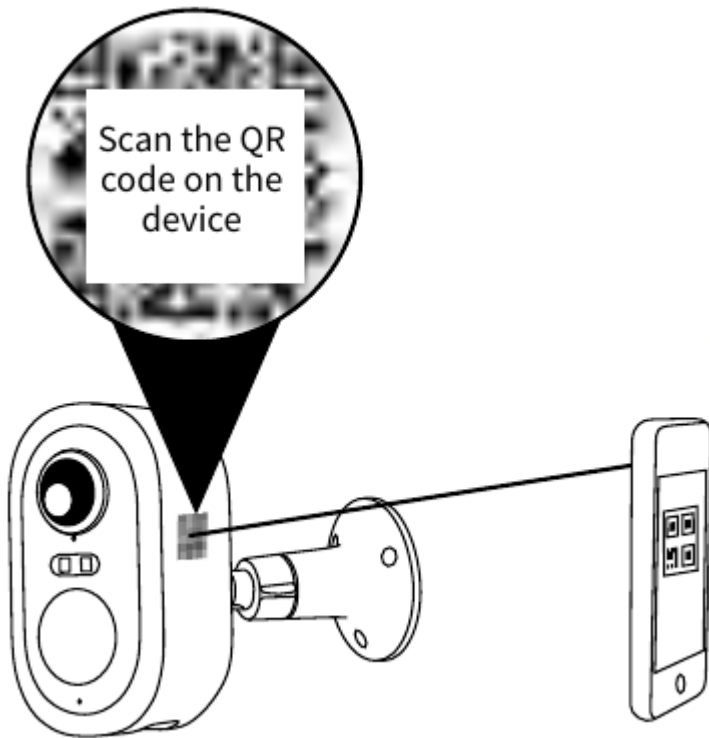


### **Pairing method 2: pairing via bluetooth**

Turn on your phone's bluetooth.


Open App home page, click "+" >> "Add Device" or "Add", the device will be searched for by bluetooth and appears on the page. Click the device and follow the notes to pair the camera with App.

### **Pairing method 3: pairing via QR code on App**



Open App home page, click "+" >> "Add Device" or "Add" and select icon according to actual camera.

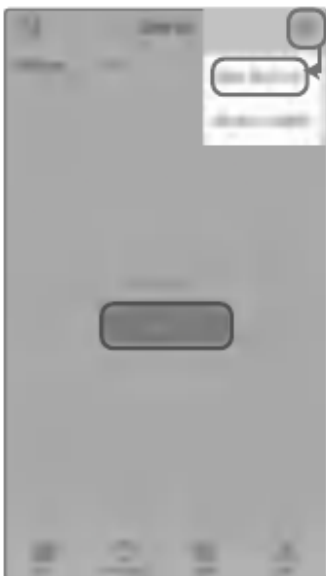

Select a fluent and steady Wi-Fi and input the password. Then, scan the QR code in the App on your camera.

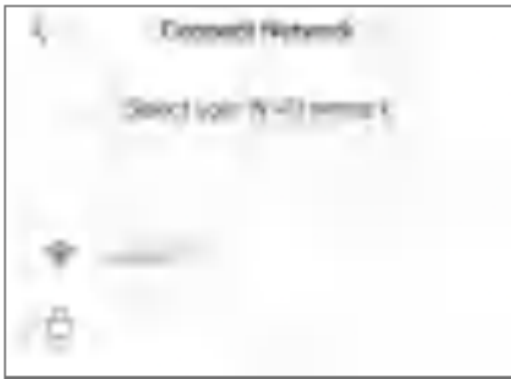

Click “Next” and use the camera to scan the QR code in the App on your mobile phone.

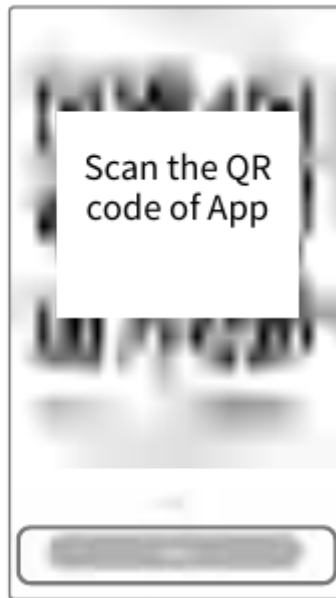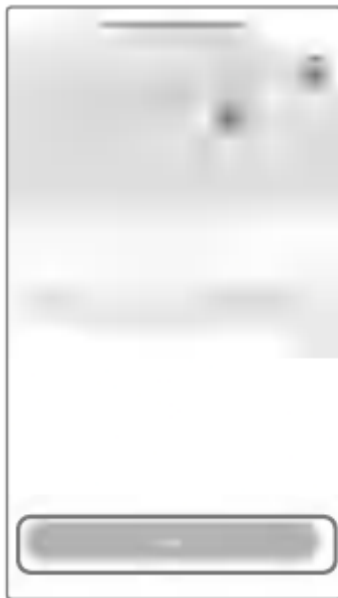

If no device is found and the pairing process is not successful, please check below instructions:

1. Make sure the camera is in pairing mode.
2. Ensure that the Wi-Fi network is set to 2.4GHz.
3. Verify that the entered Wi-Fi password is correct and that the mobile device is connected to the same Wi-Fi network.
4. Check for network activity on your Wi-Fi.

If none of the solutions works or you have any other problems, please call 1-866-999-7868 (Mon-Fri 9AM-5PM (PT), toll free for USA&Canada, subject to charges for other regions, Phone Service Language only available in English) or contact [support@arenti.com](mailto:support@arenti.com) to get help.

# Specifications

Product Name	W2
Resolution	2304 x 1296
Angle of View	135°
IR Distance	Up to 10m
Working temp.	-10°C to 50°C
Local Storage	TF card (up to 256GB)
Power Input	DC 5V/1A
Consumption	Up to 3W
Supported phone OS	iOS 9/Android 5.0 or later
2.4GHz	2412-2462MHz (Max. power<30dBm )
Bluetooth	2400-2483.5MHz (Max. power<20dBm