

# Keychron Technology (Shenzhen) 2BGKB-B1PRO Wireless Mechanical Keyboard User Manual

## Manualsum, simplified manuals

### Table of Contents

- [B1 Pro Ultra-Slim Wireless Keyboard](#)
  - [User Manual](#)
    - [IN THE BOX:](#)
    - [1. Connect 2.4GHz Receiver](#)
    - [2. Connect Bluetooth3](#)
    - [3. Connect Cable](#)
    - [4. Switch To The Right System](#)
    - [5. Switch Between Function And Multimedia Keys](#)
    - [6. Reset Keyboard](#)
    - [7. The Keychron Launcher App](#)
      - [B1 PRO ULTRA-SLIM WIRELESS KEYBOARD SPECIFICATIONS](#)
    - [B1 PRO ULTRA-SLIM WIRELESS KEYBOARD OVERVIEW](#)
- [LED STATUS OVERVIEW](#)

## **B1 Pro Ultra-Slim Wireless Keyboard**

### **User Manual**

#### **IN THE BOX:**

1. Keychron B1 Pro Ultra-Slim Wireless Keyboard x 1
2. Type-C Cable x 1
3. Type-A to Type-C Adapter x1
4. Type-A 2.4GHz Receiver x 1

5. Quick Start Guide x 1

6. Silicone Skin x 1


## 1. Connect 2.4GHz Receiver



Connect the 2.4GHz receiver to the device USB port.




Switch toggle to 2.4GHz mode




## 2. Connect Bluetooth




Switch toggle to Bluetooth




Press fn + 1 (for 4 seconds) and pair with device named Keychron B1 Pro.

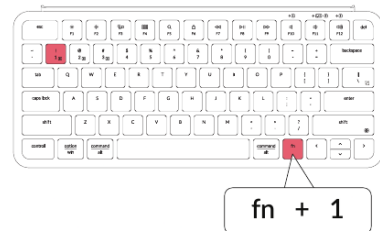

## 3. Connect Cable

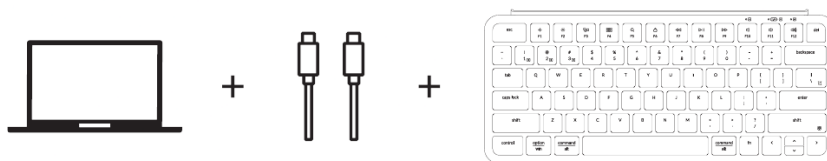

Switch toggle to Cable



## 4. Switch To The Right System

Please make sure the system toggle on the top right corner has been switched to the same system as your computer's operating system.




more. If it cannot recognize your keyboard, please reach our support to get instruction.



## **B1 PRO ULTRA-SLIM WIRELESS KEYBOARD SPECIFICATIONS**

1. Number of keys: 77
2. Battery: 800mAh
3. Battery life: 1200 hours
4. Charging time: Around 2.5 hours
5. Charging port: Type-C
6. Mode: 2.4GHz / Bluetooth / Wired
7. 2.4GHz / Bluetooth operating distance: Within 10 meters (open space)
8. Name of Bluetooth device: Keychron B1 Pro

# B1 PRO ULTRA-SLIM WIRELESS KEYBOARD OVERVIEW

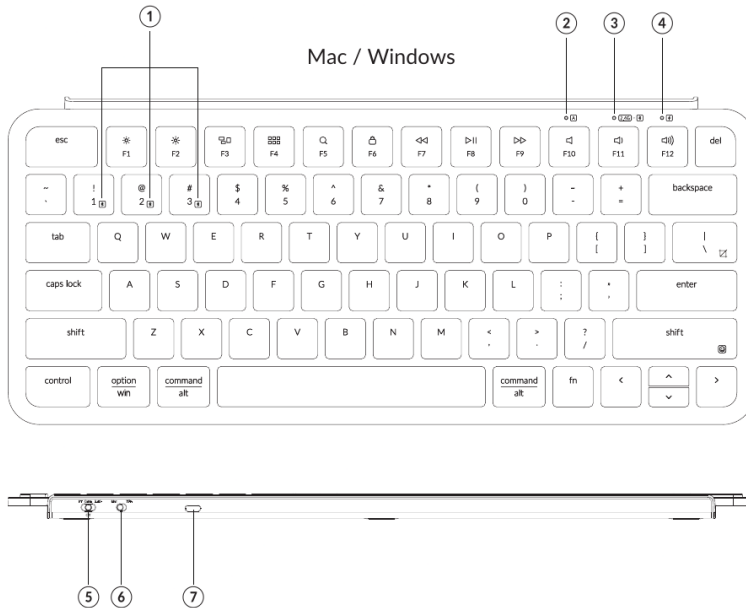

- ① Bluetooth Channel
- ② Caps Lock Indicator
- ③ 2.4GHz / Bluetooth Indicator
- ④ Charging Indicator
- ⑤ BT Cable (Off) 2.4G (Mode Toggle Switch)
- ⑥ Mac Win (OS Toggle Switch)
- ⑦ Type-C Charging Port

## LED STATUS OVERVIEW

### LED Status

Power indicator	Charging	Charging – static red   Fully charged – static green
Bluetooth / .4GHz indicator	Bluetooth / 2.4GHz	pairing -slow blinking   paired -static light and then off   Reconnecting -fast blinking
Caps lock indicator	Caps lock	Enable Caps Lock – Static White   Disable Caps Lock – light off

### 2.4GHZ / CABLE / BLUETOOTH MODE (MODE TOGGLE)

#### 2.4GHZ MODE

1. Connect the 2.4GHz receiver to your device’s USB Port.
2. Switch the toggle to the 2.4GHz option. The keyboard will automatically connect to your device.

#### BLUETOOTH MODE

1. Switch the toggle to the Bluetooth option.
2. Hold “fn+1” key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
3. Search for the Bluetooth device “Keychron B1 Pro” on your device and connect it (the Bluetooth indicator goes off after successful pairing).

[Manualsum](#)

Note: This keyboard supports pairing up to 3 devices simultaneously via key combination “fn” + “1” /

Fn +2” / “fn” + 3”

\*The Bluetooth indicator will continue to flash for 3 minutes.

\*\*Slow or failed connections may exist due to different Bluetooth versions, please make sure all the

settings are correct.

### **RECONNECT:**

1. Switch the keyboard to the Bluetooth option to activate the keyboard.
2. The Bluetooth indicator flashes for 3 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any key to enter the reconnection mode again.

\* The keyboard must have been paired with the device to perform this function.

### **WIRED MODE:**

1. Switch the toggle to the Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.

\*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

### **TROUBLESHOOTING**

If unable to pair keyboard to device, confirm that the device you’re trying to pair with is

Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.