

SHENZHEN GREENJO **OVERHEAD GOLF LAUNCH** **MONITOR User Manual** **2AT12-GSVMAX-I**

Manualsum, simplified manuals

Table of Contents

- [User's Manual for Overhead Launch Monitor](#)
 - [Product Description](#)
 - [Product introduction](#)
 - [Launch monitor](#)
 - [Status Light](#)
 - [Infrared light](#)
 - [Camera](#)
 - [Instruction](#)
 - [User Guide](#)
 - [Connecting to PC simulator for use](#)
 - [Upgrade](#)

User's Manual for Overhead Launch Monitor

(2AT12-GSVMAX-I)

Product Description


The Overhead Launch Monitor is one of the best launch monitors equipped with a high-speed camera. It features original imported high-order control chips and sensor chips, providing powerful image processing capabilities and computational performance. It can be connected to both mobile apps and PC terminals for use.

The Portable Launch Monitor includes the following product models: GSV MAX, CES MAX, and PSV MAX.

[Manualsum](#)

Product introduction

Launch monitor

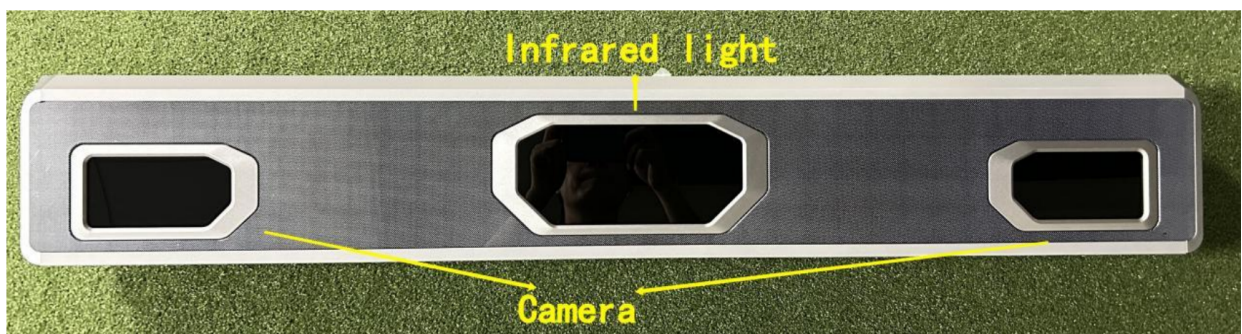

Status Light

When the monitor is powered on, the red light remains on while the blue light flashes. After the startup process is completed, which takes approximately 30 seconds, both the red and blue lights will remain on.

When connected to an application or PC software, the red light will turn off and the blue and green lights will remain on after recognizing the ball. [Manualsum](#)

After the ball is hit, the green light will turn off, and the red and blue lights will come on.




Infrared light

1st step, after successfully connecting to the APP or PC terminal, the first gear is always on (only visible with a mobile camera) 2nd step, after recognizing the ball (with a green status light), the second gear is always on (visible to the naked eye).



Camera

It is one of most important functional modules positioning balls. It should not be obstructed during the process of hitting balls and the exterior of the lens should be kept clean and tidy for a long time.

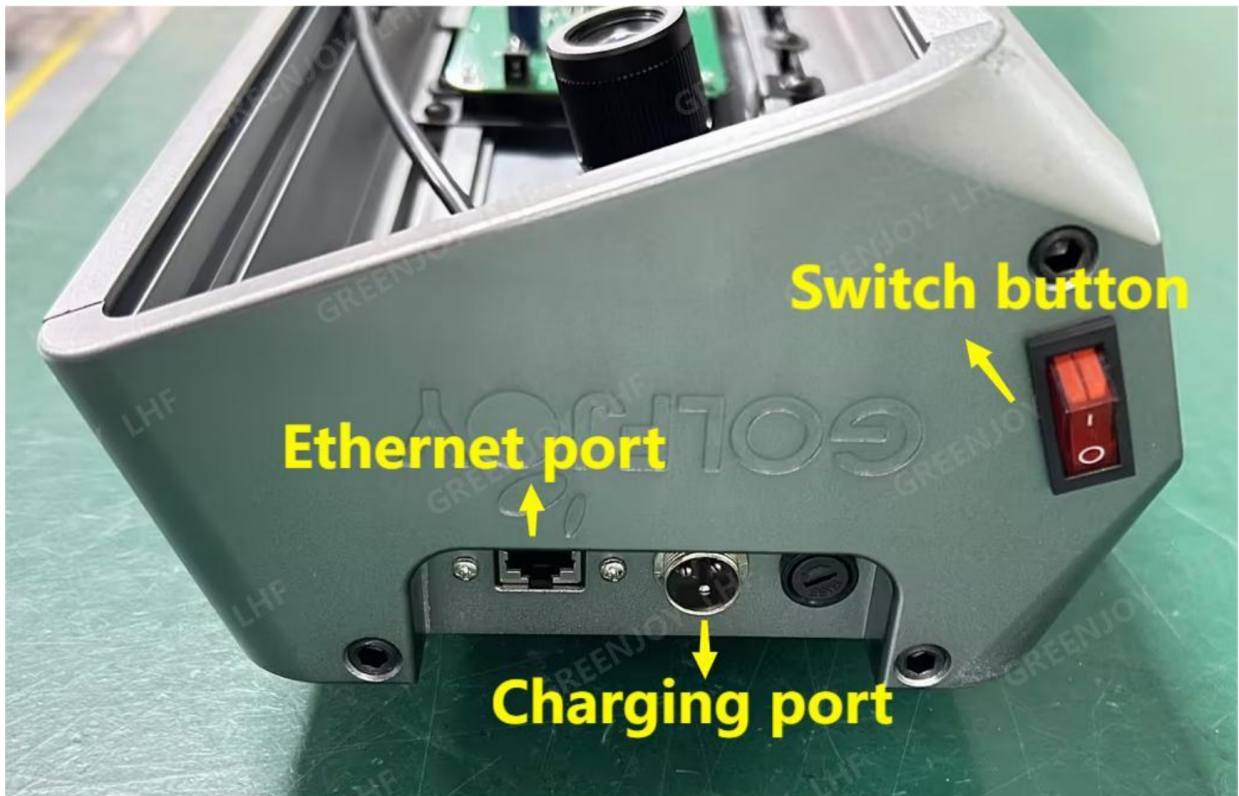

Instruction

Switch button: Press the “O” button to turn off the device, Press the “|” button to turn on the device.

Charging port: To charge the monitor, it connects to a 24V adapter.

Ethernet port: Connecting a gigabit network cable and a network port for monitor calibration and playing golf.

User Guide

Connecting to PC simulator for use

1. Use a gigabit network cable to directly connect the monitor to PC computer network port (gigabit), and connect the PC network port IP to the monitor IP (factory default 192.168.1.147) in the same network segment (192.168.1. X).
2. Modify simulator configuration: Change the IP in the simulator configuration file to the monitor IP (192.168.1.147), and configure the type of Launch monitor to GSVMAX.
3. Open the simulator for playing golf.

Upgrade

When there are new features added to the monitor, a new firmware version will be iteratively upgraded.

[Manualsum](#)

There are 2 ways to upgrade: one is to self upgrade through the APP; The second is to upgrade through self-service prompts on the PC terminal.