


[Shenzhen YiDianTong Ecommerce 2AQ4C-Y- D002-592 360 2.4G controller \(audio\) User Manual](#)

[Manualsum](#), simplified manuals

Table of Contents

- [360 2.4G controller \(audio\)](#)
- [User Guide](#)
- [Pre-Pairing Considerations:](#)
- [LED Indicator Guide:](#)
- [Controller Layout](#)
- [How to Pair:](#)

360 2.4G controller (audio) User Guide

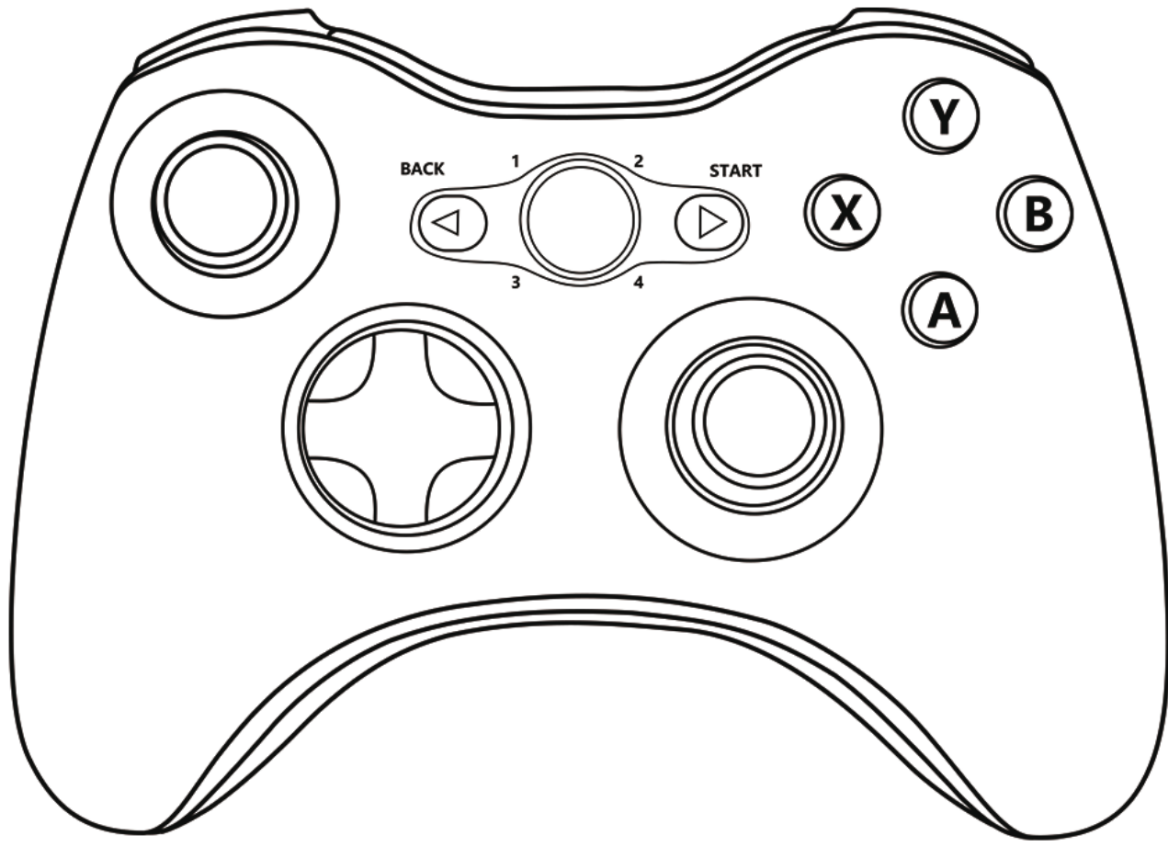

Pre-Pairing Considerations:



1. Ensure the controller is correctly inserted with 2AA batteries or the dedicated battery pack.
2. For seamless detection, connect the receiver into the USB port prior to powering on your device or launching an emulator. If the controller is not detected during pairing, consider restarting your device.

LED Indicator Guide:

1. Press the "X" button, and the "4 LED" lights will flash slowly, indicating that the controller is powered on. [Manualsum](#)

2. One of the “4 LED” lights remains illuminated indicating a successful pairing connection of the controller.
3. The “4 LED” indicator will display the channel of the controller.
4. When the controller is paired and in use, a slow, periodic blinking of the LED (approximately every 2.5 seconds) indicates low battery power.

Controller Layout

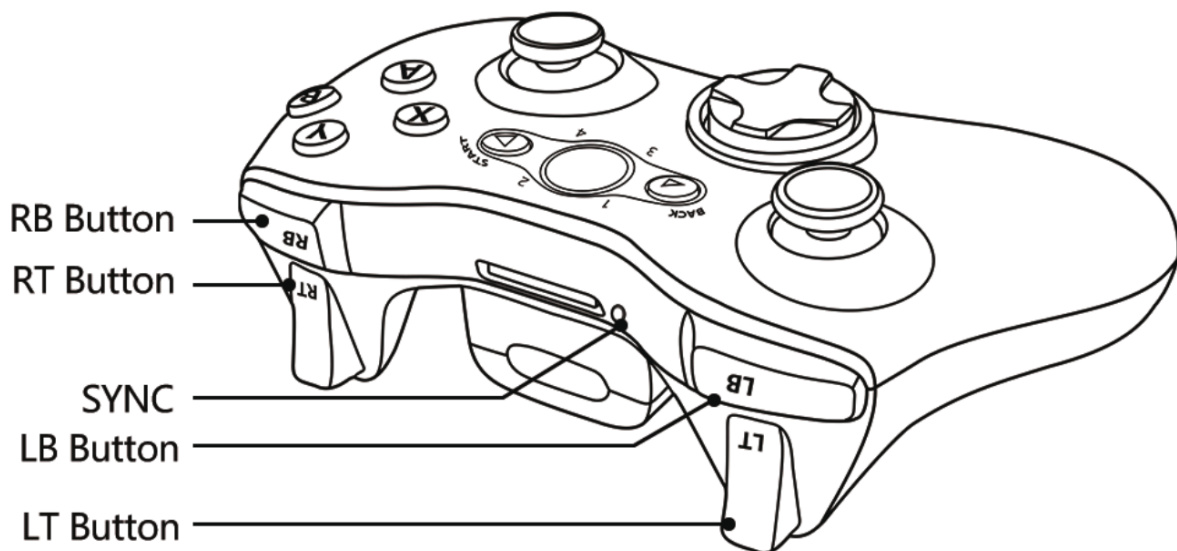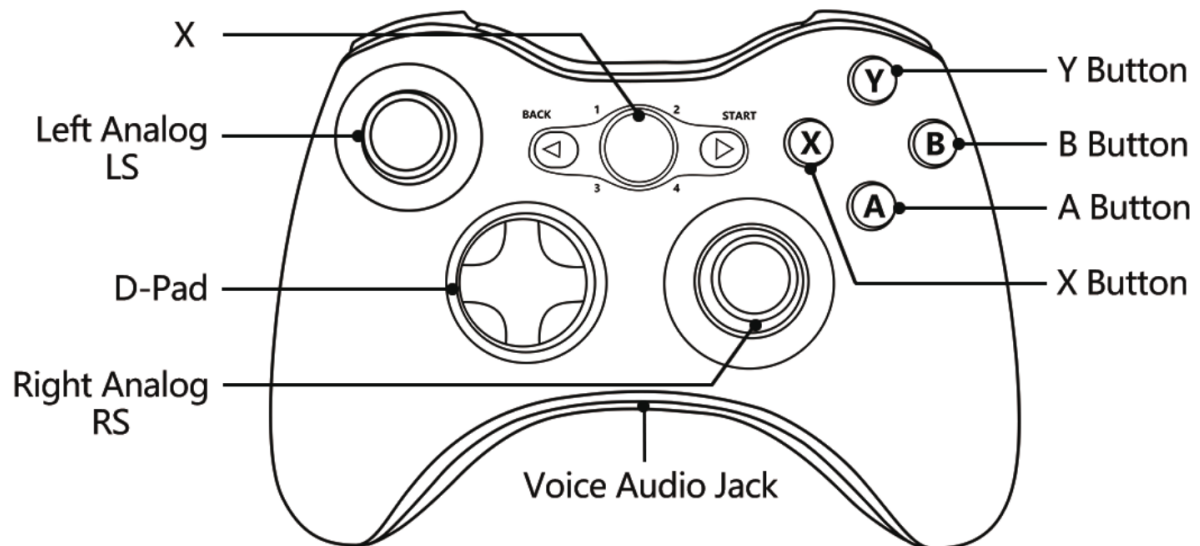


How to Pair:


Step 1. Insert the receiver into the device's USB port and wait for the LED on the receiver to start flashing.



Step 2. Press the "SYNC" button on the Receiver once, and its LED will flash rapidly, entering pairing mode.

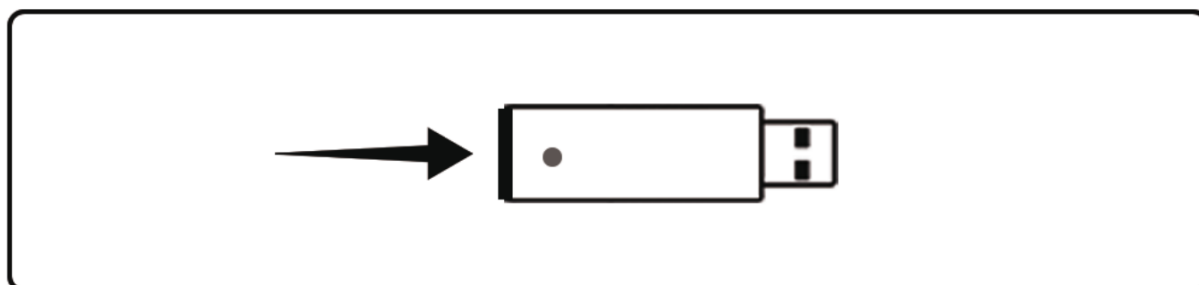

Step 3. Press the "X" button to power on the Controller. The "4 LED" lights on the Controller will start flashing slowly.

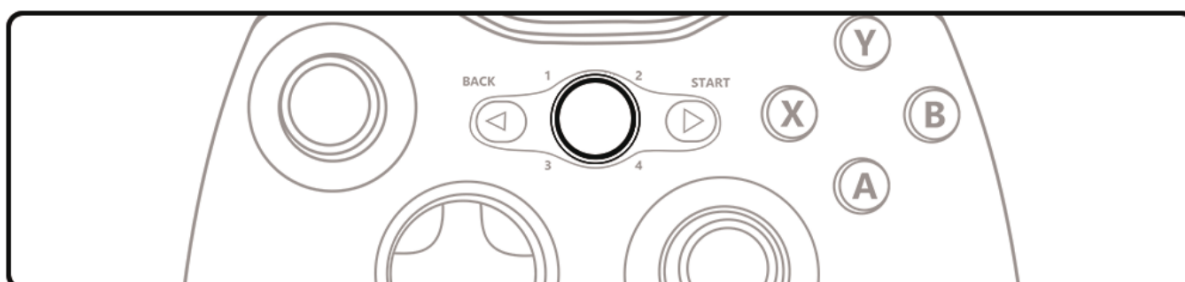

Step 4. Press and hold the “SYNC” button on the Controller until the “4 LED” lights start alternating flashing.

Step 5. Wait for one of the “4 LED” on the Controller and the Receiver LED to remain illuminated at the same time, indicating the Controller successful pairing.

