
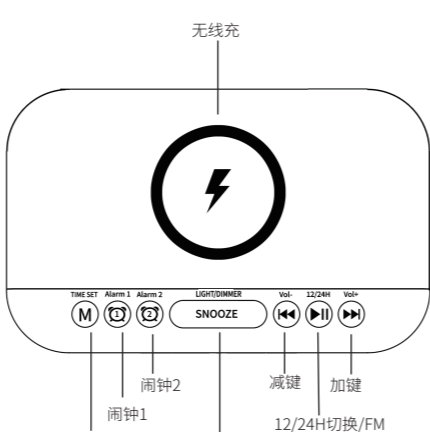
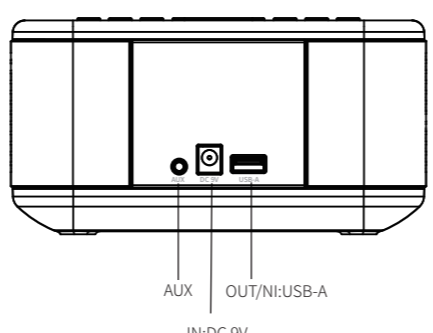


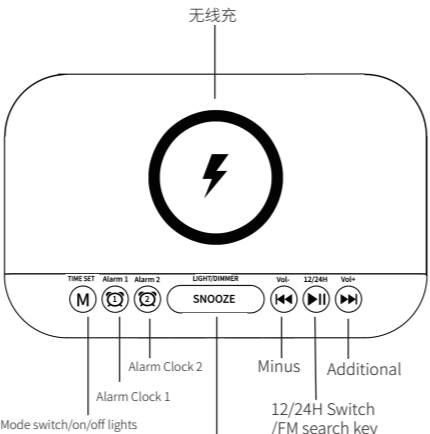
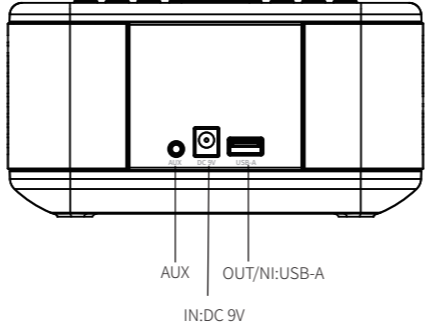



<p><b>使用说明书</b></p> <p><b>A21-B 多功能闹钟</b></p> <p>时钟+闹钟+无线充+蓝牙音箱+收音机+RGB彩灯(夜灯)</p> 	<p><b>产品清单:</b></p> <p>主机*1 适配器*1 使用说明书*1</p> <p><b>产品参数:</b></p> <p>蓝牙版本:5.3</p> <p>蓝牙距离:</p> <p>功能:蓝牙音乐, 蓝牙通话, 时钟, 双闹钟, 贪睡, 收音机, 电台可做闹铃铃声, AUX/USB播放, 无线充, RGB彩灯, 助眠夜灯, 起床唤醒灯, 12/24时间制显示, USB-A输出口, 蓝牙连接手机自动同步手机时间;</p> <p>喇叭功率:5W*2</p> <p>充电规格: DC 9V</p> <p>USB-A输出: 5V/1A</p> <p>无线充输出:5W max</p> <p>产品净重:420g</p> <p>产品尺寸:170*105*85mm</p> <p><b>温馨提示:连接蓝牙可自动同步手机时间</b></p>	<p><b>面板功能:</b></p>  <p>模式切换/开/关灯</p> <p>时钟设置/贪睡/灯效切换/亮度调节</p>	<p><b>接口功能:</b></p> 	<p><b>显示面板:</b></p>  <ul style="list-style-type: none"> <li>● 电源标识:连接电源, 蓝灯亮, 随屏幕亮度变化</li> <li>🔔 贪睡标识:贪睡开启, 标识常亮, 贪睡关闭, 灯灭;</li> <li>🔔 闹钟1标识:闹钟1开启常亮, 关闭状态下灯灭</li> <li>🔔 闹钟2标识:闹钟2开启常亮, 关闭状态下灯灭</li> <li>🔊 音频标识:AUX音频模式下, 常亮</li> <li>⚡ 蓝牙标识:蓝牙模式下, 未连接闪烁, 连接后常亮</li> <li>⚡ 闪电标识:手机无线充电状态下, 蓝灯慢闪, 充满电, 蓝灯常亮, 异物检测红灯常亮;</li> <li>AM 12小时制标识:切换12小时制, 标识常亮</li> <li>PM 24小时制标识:切换24小时制, 标识常亮</li> <li>MHz 收音机标识:收音机模式下, 标识常亮</li> </ul>	<p><b>使用说明:</b></p> <p><b>开机/关机:</b>连接原配适配器, 连接电源可以直接开机。开机成功, 屏幕显示, 底部多彩灯效亮起; 开机默认为时钟模式, 断开电源直接关机;</p> <p><b>蓝牙连接:</b>单击模式键, 切换选择蓝牙模式, 打开手机蓝牙, 点击配对名“A21-B”进行连接, 蓝牙连接成功后会自动同步手机时间到时钟上, 连接后即可进行音乐播放;</p> <p><b>模式切换:</b>单击模式切换键, 切换蓝牙/收音/AUX/USB播放模式;</p> <p><b>闹钟设置:</b>长按时间设置键3秒进入时钟设置, 短按切换时/分设置, 单击加或减键调整时间, 长按确定设置</p> <p><b>温馨提示:连接蓝牙可自动同步手机时间</b></p> <p><b>闹钟及铃声设置:</b>长按闹钟1或闹钟2进入闹钟1或闹钟2设置, 单击加减键切换设置闹钟时间与闹钟;(闹钟响起, 底部暖白光呼吸灯亮起至最亮, 闹钟结束, 灯光关闭)</p> <p><b>闹钟开启或关闭:</b>单击“闹钟/闹铃键”开启/关闭闹钟(可观察屏幕闹钟标识确认闹钟的开启状态)</p> <p><b>电台设置或闹钟铃声:</b>FM收音模式下, 电台搜索完成后, 调到喜欢听的电台, 双击“闹钟1或闹钟2”键将当前电台默认到闹钟1/闹钟2做闹铃铃声, 也可以进入铃声设置里切换铃声;</p>	<p><b>贪睡功能:</b>闹钟响起状态下:单击“贪睡键”闹钟贪睡9分钟, 闹钟响起状态下长按贪睡键关闭当前闹铃。单击闹钟1或闹钟2设置键, 关闭闹钟, 可通过屏幕观察贪睡开启/关闭状态;</p> <p><b>屏幕亮度调整:</b>单击“贪睡/灯效键”可循环调整屏幕亮度, 共5档亮度选择, 最后一档为关闭屏幕。</p> <p><b>灯效切换:</b>双击“贪睡/灯效键”可切换RGB灯效, 单击可调节亮度, 共6种灯效, 最后一种灯效为关闭灯(白光/暖白光/暖光灯可做小夜灯功能);</p> <p><b>AUX/USB播放:</b>连接AUX转接线或插入U盘, 自动切换到AUX或USB模式播放歌曲, 也可以通过模式键切换播放模式;</p> <p><b>无线充电:</b>手机放到闹钟顶部无线充电区域, 自动识别进行充电(注意:手机需支持无线充电功能)</p> <p><b>USB-A充电:</b>用USB充电线连接主机USB-A充电口既可以给手机等设备充电;</p> <p><b>播放控制:</b>可通过单击暂停键/上一曲键/下一曲键来控制播放状态;</p>	<p><b>12/24H切换:</b>长按“播放暂停键”3秒切换12/24H时间制显示;</p> <p><b>收音机使用:</b>单击“模式切换键”选择FM模式, 长按“暂停键”进行电台搜索, 单击“暂停键”暂停或播放; 双击“暂停键”当前电台存储为闹铃铃声;</p> <p>(*注意:FM模式使用时, 请将天线拉升至最长, 并靠近窗户位置)</p> <p><b>注意事项:</b></p> <ol style="list-style-type: none"> <li>1.提醒您勿在高温, 潮湿, 多尘的环境下使用</li> <li>2.提醒您, 使用过程中避免本机掉落或与硬物撞击, 避免接触水等液体, 避免可能导致本机损坏</li> <li>3.请勿用高温烘烤本机, 否则易烧毁或使机器内部元器件损坏</li> <li>4.如果机器出现异常, 请联系我们进行售后处理</li> </ol> <p>非常感谢您的信任与支持, 希望您从说明书中得到所需要的产品信息, 并享受该产品带来的乐趣;</p> <p>您的满意, 我们的追求!</p>
---	---	---	---	--	--	--	--

<p><b>Instruction manual</b></p> <p><b>A21-B Multi-function alarm clock</b></p> <p>Clock + alarm clock + wireless charger + Bluetooth speaker + radio + RGB color lights (night lights)</p> 	<p><b>Product list:</b></p> <p>Host *1 Adapter *1 Instruction manual *1</p> <p><b>Product parameters:</b></p> <p>Bluetooth version: 5.3</p> <p>Bluetooth distance:</p> <p>Features: Bluetooth music, Bluetooth call, clock, double alarm clock, snooze, radio, radio can make alarm bell, AUX/USB playback, wireless charging, RGB color lights, sleep night lights, wake up and wake up lights, 12/24 time system display, USB-A output, Bluetooth connected mobile phone automatically synchronize mobile phone time;</p> <p>Horn power: 5W*2</p> <p>Charging specification: DC 9V</p> <p>USB-A output: 5V/1A</p> <p>Wireless charging output: 5W max</p> <p><b>Tip:</b> Bluetooth connection can automatically synchronize the phone time</p>	<p><b>Panel functions:</b></p>  <p>Mode switch/on/off lights</p> <p>Clock setting/Snooze/Light effect switching/Brightness adjustment</p>	<p><b>Interface function:</b></p> 	<p><b>Display panel:</b></p>  <ul style="list-style-type: none"> <li>● Power identifier: Connected to the power supply, blue light, changes with the screen brightness</li> <li>🔔 Snooze sign: Snooze on, sign on, snooze off, light off;</li> <li>🔔 Alarm 1 identifier: Alarm 1 On The indicator is steady on and the indicator is off</li> <li>🔔 Alarm 2 identifier: Alarm 2 on The indicator is steady on, and the indicator is off when the alarm is off</li> <li>AUX Audio identifier: In AUX audio mode, steady on</li> <li>⚡ Bluetooth identifier: In Bluetooth mode, it blinks when not connected and lights up after connection</li> <li>⚡ Lightning mark: When the mobile phone is wireless charging, the blue light flashes slowly Fully charged, blue light on, foreign body detection red light on;</li> <li>AM 12-hour indicator: Switch to 12-hour indicator and the indicator is steady on</li> <li>PM 24-hour system indicator: Switch to 24-hour system and the indicator is steady on</li> <li>Radio identifier: In radio mode, the identifier is steady on</li> </ul>	<p><b>Instructions for use:</b></p> <p><b>Power on/off:</b> connect the original adapter, connect the power supply can directly boot, boot successfully, the screen display, the bottom of the multi-color light effect light up; Boot default clock mode, turn off the power directly;</p> <p><b>Bluetooth connection:</b> Click the mode key, switch to select Bluetooth mode, turn on the Bluetooth of the phone, click the pairing name "A21-B" to connect, after the Bluetooth connection is successful, the phone time will be automatically synchronized to the clock, and music can be played after the connection;</p> <p><b>Mode switch:</b> Click mode switch key to switch Bluetooth/radio/AUX/USB playback mode;</p> <p><b>Clock setting:</b> Long press the time setting key for 3 seconds to enter the clock setting, short press the switch hour/minute setting, click the plus or minus key to adjust the time, and long press to confirm the setting (Tips: Bluetooth connection can automatically synchronize the phone time)</p> <p><b>Set alarm clock and alarm clock:</b> press and hold Alarm clock 1 or alarm clock 2 to enter the setting of alarm clock 1 or alarm clock 2, and click the Add or subtract key to switch the setting of alarm time and alarm clock.</p> <p>(The alarm clock rings, the bottom warm white light breathing lights up to the brightest, the alarm ends, the light turns off)</p>	<p><b>Snooze function:</b></p> <p>When the alarm is ringing, click Snooze. Snooze for 9 minutes. When the alarm is ringing, hold down the snooze button to disable the current alarm. Click the set key of alarm 1 or Alarm 2 to turn off the alarm clock and observe the status of snooze on/off through the screen.</p> <p><b>Screen brightness adjustment:</b> Click "snooze/Light effect key" to adjust the screen brightness cycle, a total of 5 brightness choices, the last gear is to close the screen,</p> <p><b>Light effect switch:</b> Double click "snooze/Light effect key" to switch RGB light effect, click to adjust the brightness, a total of 6 light effects, the last light effect is to turn off the light (white light/warm white light/warm light can do night light function);</p> <p><b>AUX/USB playback:</b> Connect the AUX transfer cable or insert the U disk, automatically switch to AUX or USB mode to play songs, you can also switch the playback mode through the mode key;</p> <p><b>Wireless charging:</b> The mobile phone is placed in the wireless charging area on the top of the alarm clock and automatically recognized for charging (Note: the mobile phone needs to support wireless charging function)</p> <p><b>Usb-a charging:</b> Connect the host USB-A charging port with A USB charging cable to charge devices such as mobile phones;</p> <p><b>Play control:</b> You can control the play state by clicking pause/up/down key.</p>	<p><b>12/24H switch:</b></p> <p>Long press the "Play Pause button" for 3 seconds to switch the 12/24H time system display;</p> <p><b>Radio use:</b> Click "Mode switch key" to select FM mode, long press "Pause key" to search for radio station, click "pause key" to pause or play; Double click "Pause" button to save the current radio as the alarm tone;</p> <p>(* Note: When using FM mode, please open the antenna to the longest position and close to the window)</p> <p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. Remind you not to use in high temperature, wet, dusty environment</li> <li>2. Remind you to avoid falling or hitting with hard objects during use, avoid contact with water and other liquids, and avoid possible damage to the machine</li> <li>3. Do not bake the machine at high temperature, otherwise it is easy to burn or damage the internal components of the machine</li> <li>4. If the machine is abnormal, please contact us for after-sales treatment</li> </ol> <p>Thank you very much for your trust and support, I hope</p>
---	--	---	---	---	--	--	--

## FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

## IC Caution:

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

To maintain compliance with RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Pour maintenir la conformité aux directives d'exposition aux radiofréquences, cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.