

NIMBOT SMART LABEL PRINTER USER MANUAL 2ARXB-B21P

Manualsum, simplified manuals


Table of Contents

- [NIMBOT SMART LABEL PRINTER USER MANUAL](#)
 - [Package Contents](#)
 - [Installation](#)
 - [Installing App](#)
 - [Download App](#)
 - [Download Desktop Version](#)
 - [Connecting and Printing](#)
 - [Basic Functions](#)
 - [LED Indicators](#)
 - [Specifications](#)
 - [Safety Precautions](#)
 - [*Warnings](#)


NIMBOT SMART LABEL PRINTER USER MANUAL

NIMBOT SMART LABEL PRINTER USER MANUAL


(2ARXB-B21P)

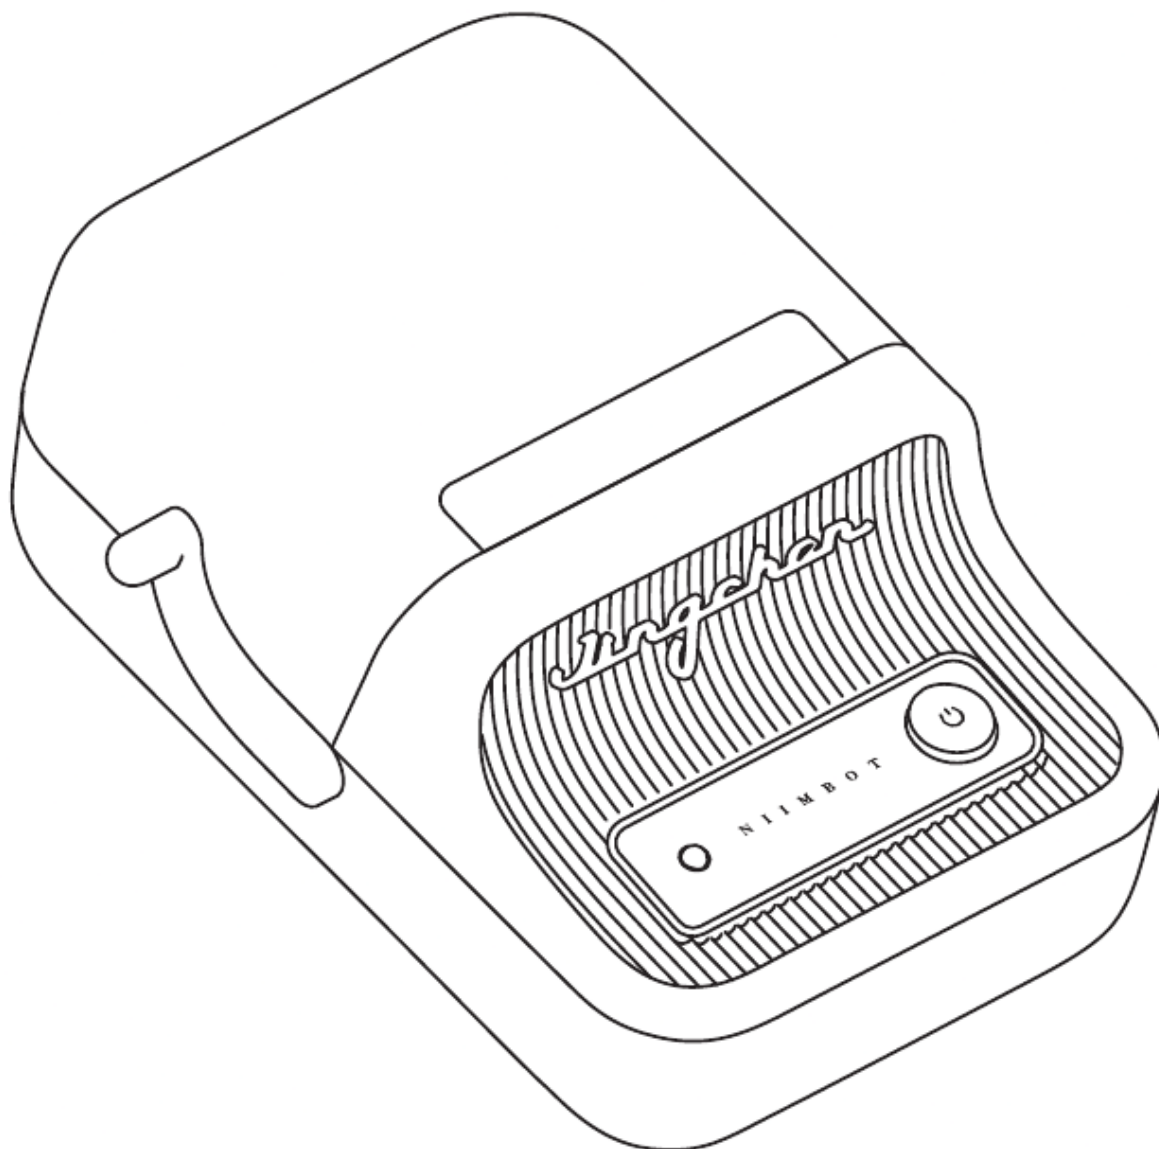


Package Contents



Smart Label Printer *1



Label Paper Roll *1




USB Type-C Cable *1




Quick Start Guide *1


Installation

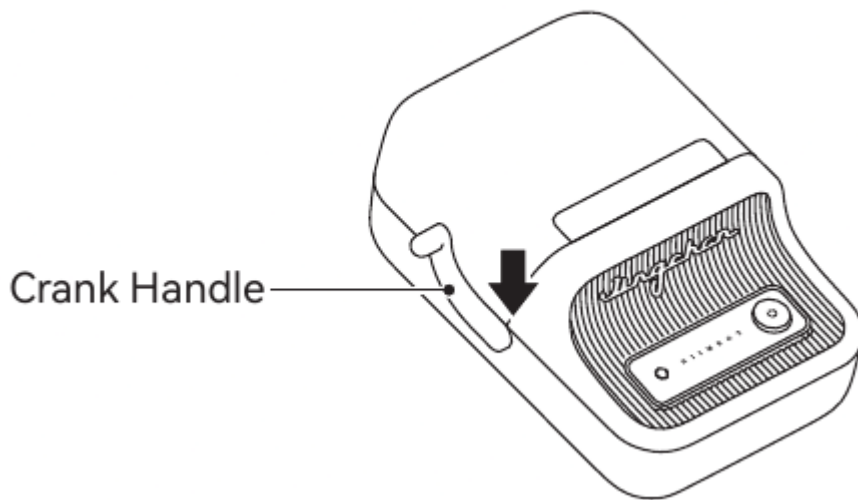

Press and hold the power button for 2-3 seconds to power on the device
Press down the crank handle on the left side of the device to open the paper compartment.

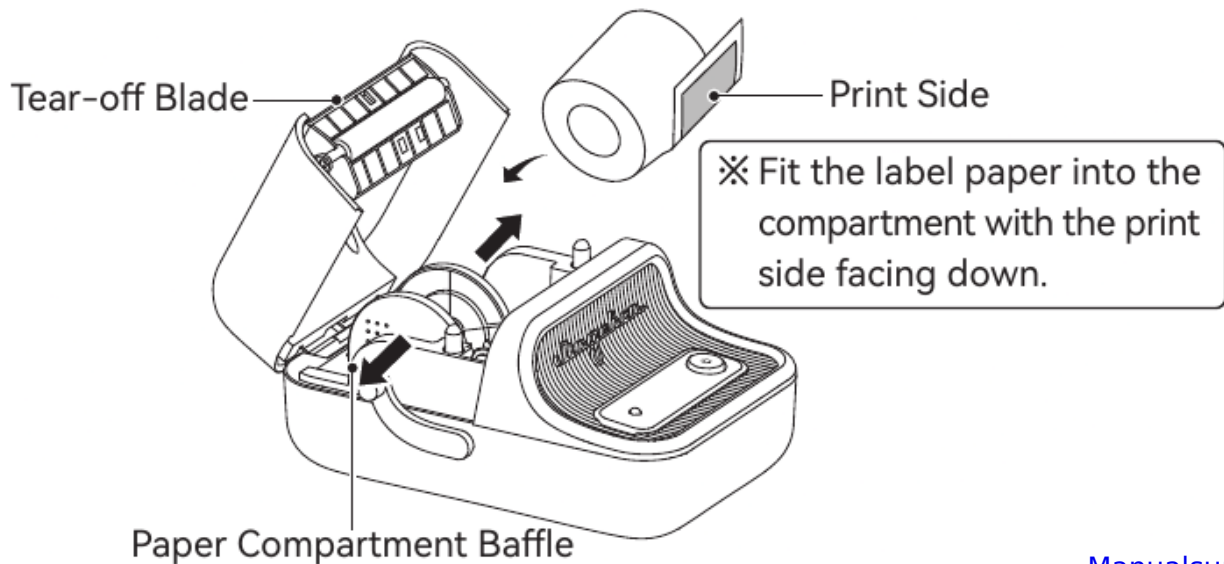

Push the paper compartment baffle to both sides and fit the label paper roll down into the compartment.

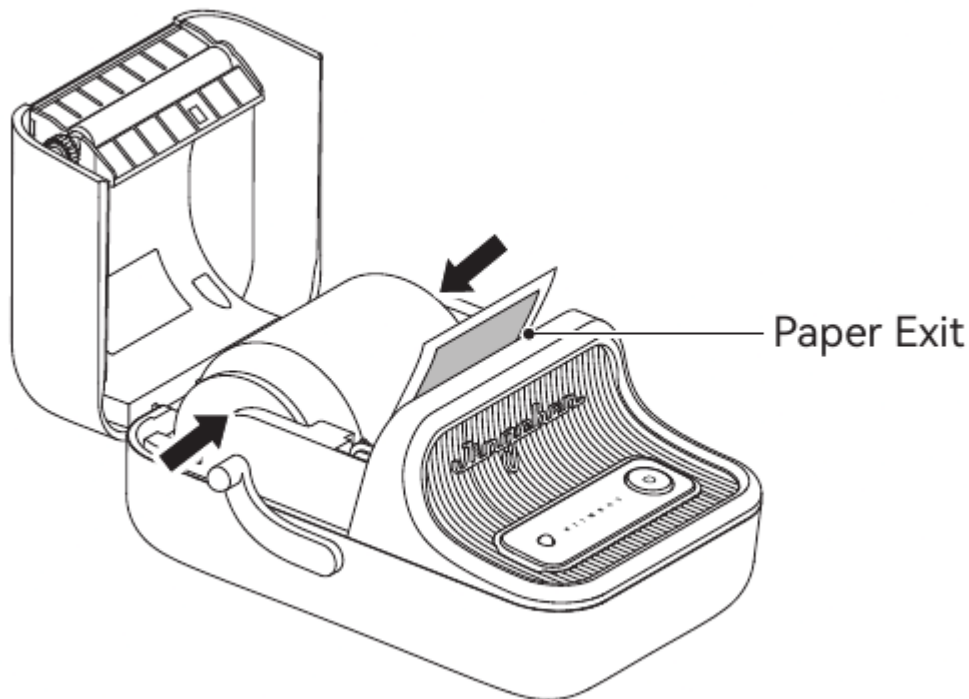

Slide the paper compartment baffle inwards to secure the label paper, pull the first paper out, make sure it sticks out of the paper exit, and then close the paper compartment cover to complete the paper loading process.

Installing App

Download App

1. Before using the printer, please install the NIIMBOT app from Google Play or the App Store.



NIIMBOT
Design & Print APP
easy to download and use



- More information available on the NIIMBOT app.



2. Get the NIIM app for more label designs for homes.

[Manualsum](#)



NIIM
Design & Print APP
easy to download and use



Download Desktop Version

You can download and install “NIIMBOT” Desktop version from our official website (www.niimbot.com).

- **Notice:** In case you need to connect your computer to the device, please use the original data cable or a data cable that supports data transfer.

Connecting and Printing

1. After downing the APP, make sure your phone’s Bluetooth is on.

- **Note:** For Android phones, location permission must be granted.



Turn on Bluetooth

2. Open the APP, search and connect to the device through Bluetooth.

- **Notice:** If a PIN code is required, input 0000 or 1234.

3. After connecting, enter the “Canvas” page to edit.

Special Notes

Images of products, accessories, and the app in this manual are for illustrative purposes only and may be different from actual products. Products are subject to change without prior notice.

Basic Functions

Function	Operation
Switch on	Hold down the Power button for three seconds.
Switch off	Hold down the Power button for three seconds when the device is on.
Feeding Paper	Press the Power button once when the device is on.
Print a test page	Double-press the Power button when the device is on.

LED Indicators

Indicator Status	Description
Blue Blinking	Hardware upgrading
Blue Solid	Standby
Green Blinking	Printing
Green Solid	Bluetooth connected
Red Blinking	Charging
Red Solid	Paper compartment open / Out of paper / Paper exit error




Specifications

Product	Label Printer
Dimensions	130*94*6 1mm
Charging Time	3 - 4 Hours
Battery Capacity	1500mAh
Printing Resolution	300dpi
Connectivity	Bluetooth, Type-C
Model	NIIMBOT B21_Pro
Weight	299g
Input	5VDC, 1A
Printing Method	Thermal printing
Printing Width	48mm
Charge	Type-C
Operating Temperature	0~40°C

Safety Precautions

Please read all the instructions and warnings in this manual carefully before using this product to ensure the proper functioning of the device and your safety.

*Warnings

 <p>Don't disassemble the product without authorization. Disassembled products cannot be returned or exchanged.</p>	 <p>Do not wipe the product with corrosive chemicals or cleaning agents.</p>	 <p>Do not use the product near places with flammable products such as gas stations or fuel depots.</p>
--	---	--

1. Please keep the product and accessories out of the reach of children or they must be used under the supervision and guidance of a guardian;
2. Turn off the power immediately when water gets into the product;
3. Turn off the power immediately in case of any product malfunction;
4. If you want to use a power adapter, always use one that is safe, regulatory-compliant, and compatible;
5. Do not use batteries of different specifications, or they may cause the safety protection to be ineffective;
6. Do not expose batteries to fire or heat; do not squeeze or cut the battery pack with mechanical devices, which may cause an explosion.
7. Do not expose batteries at high temperatures, which may cause explosion or leakage of flammable liquids or gases. Extreme low air pressure may also cause explosion or leakage of flammable liquids or gases.
8. If smoke or smell comes from the product or the power adapter, please unplug the power adapter immediately and avoid any burns.